


DATAVISOR MARQUEES

3 Connections / ONE Product



MESSENGER MARQUEE SERIES

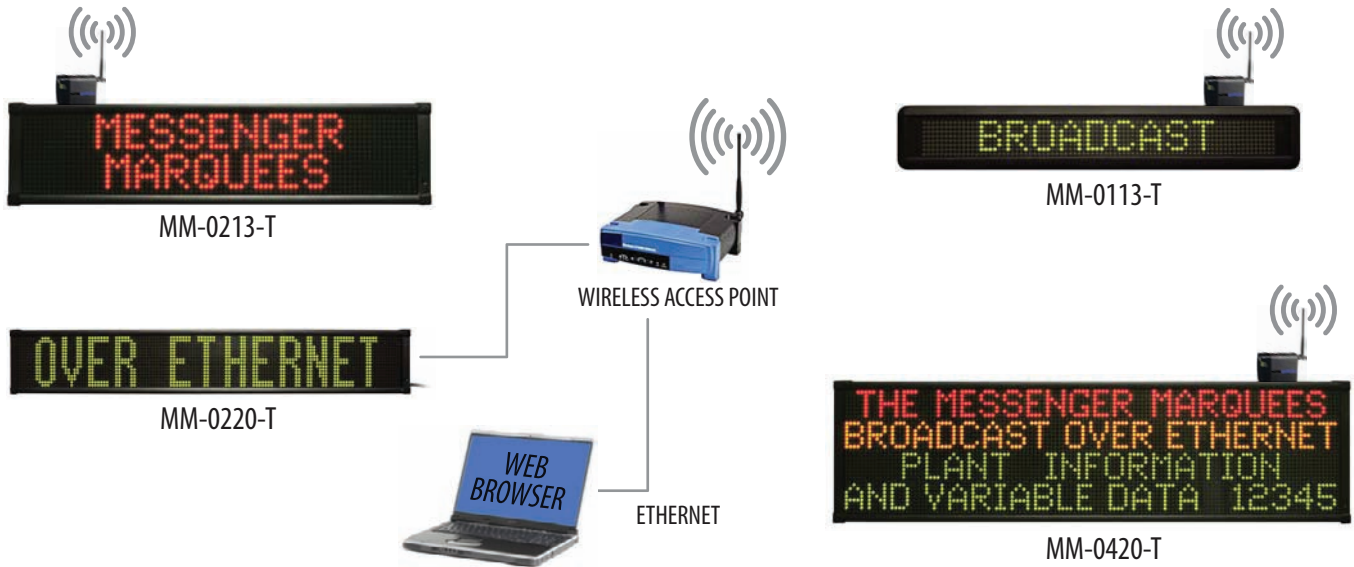

PRODUCT FEATURES

- NO SOFTWARE REQUIRED! Embedded web server
- Selection of 25+ display message modes
- Web based message editor and controller
- 10/100 ethernet communication port
- UDP message functionality
- Serial communication port (RS232/RS485)
- Receive data/alarms from EXOR UniOP HMI
- Broadcast company information & lost time data
- Display variable data from ERP systems
- Display 3rd party spreadsheet data to marquee


PRODUCT SPECIFICATIONS

- 1, 2, and 4 line alphanumeric display
- Bright tricolor LED
- Display 2", 3", or 4" character height
- 13 and 20 character width
- 100,000 hour rated LED life
- Operating temperature 0-55 C
- Metal housing; NEMA 1
- Hand held IR programmer
- 120 VAC power; 24 VDC (1 line model)
- Upgradable firmware (update to new features)


PART NUMBER MODEL	DIMENSIONS (W x H x D)	WEIGHT
MM-0113-T (1 line, 13 characters, tricolor)	26.0" x 4.5" x 1.75"	2.8 LBS.
MM-0213-T (2 line, 13 characters, tricolor)	25.5" x 6.25" x 3.75"	10.8 LBS.
MM-0220-T (2 line, 20 characters, tricolor)	39.75" x 6.25" x 3.75"	17.9 LBS.
MM-0420-T (4 line, 20 characters, tricolor)	39.75" x 11.0" x 3.75"	26.2 LBS.

CONNECTIVITY SOLUTIONS

ETHERNET CONFIGURATION

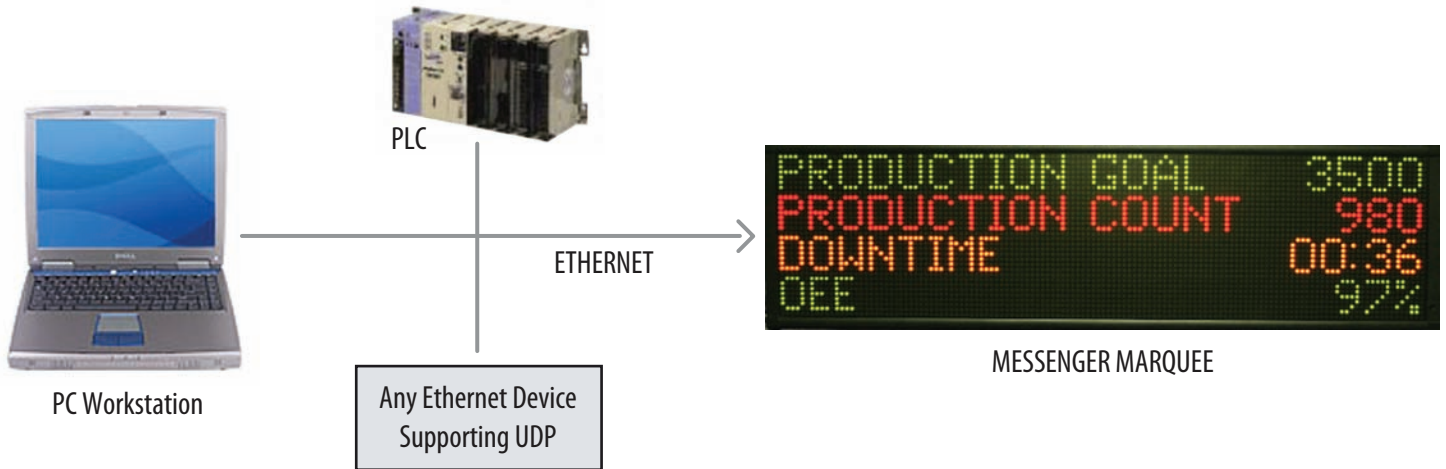

SERIAL CONFIGURATION

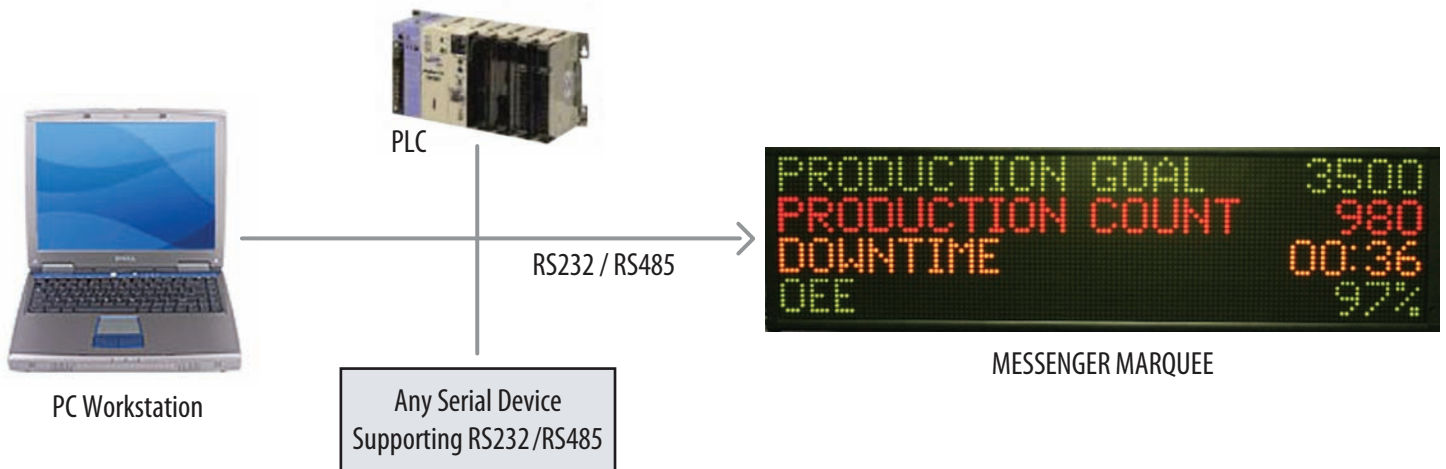

EXOR HMI CONFIGURATION

