

NX1 Machine Automation Controller

Continue to pursue productivity

The image features a hand holding an Omron NX1 Machine Automation Controller. The controller is a black and white rack-mounted unit with multiple ports and status indicators. Overlaid on the image are several data visualization icons: a circular gauge showing 90%, a bar chart with an upward trend, a line graph with fluctuations, and a computer monitor icon. The background shows a blurred industrial environment with machinery and a keyboard in the foreground.

The solution in your hand

Improve productivity, improve your business

The manufacturing industry is under pressure to keep boosting productivity without compromising on quality. Global production and flexible production are required to satisfy diverse consumer needs.

In addition, manufacturers need to control quality and safety to provide the same level of quality and meet rising quality and safety standards.

In order to fulfill these requirements, it is crucial to utilize information, take safety measures, control quality, and at the same time improve production efficiency.

Common issues

Compromise between production efficiency and information utilization/safety measures/quality control

INFORMATION

Production cycle time is increased due to traceability data processing

Full traceability is required to meet high-level quality standards. As it takes a long time to process all traceability data, the production cycle time increases.

SAFETY

Safety measures make setup and troubleshooting difficult

Separate safety control for machines and lines and separate controllers for machine control and safety are required. Line and machine design is time-consuming, and safety measures have to be redesigned when the layout is changed.

QUALITY

Production lead time is increased due to additional inspections and tight quality control

Adding inspections to maintain quality increases production lead time. When special machines with built-in PC that collect and process data at high speeds are used for inspections, maintenance becomes difficult. Instead, acceptance sampling is conducted offline.




NX1

The Next Standard

NX1

Improves production efficiency while optimizing information utilization, safety measures, and quality control

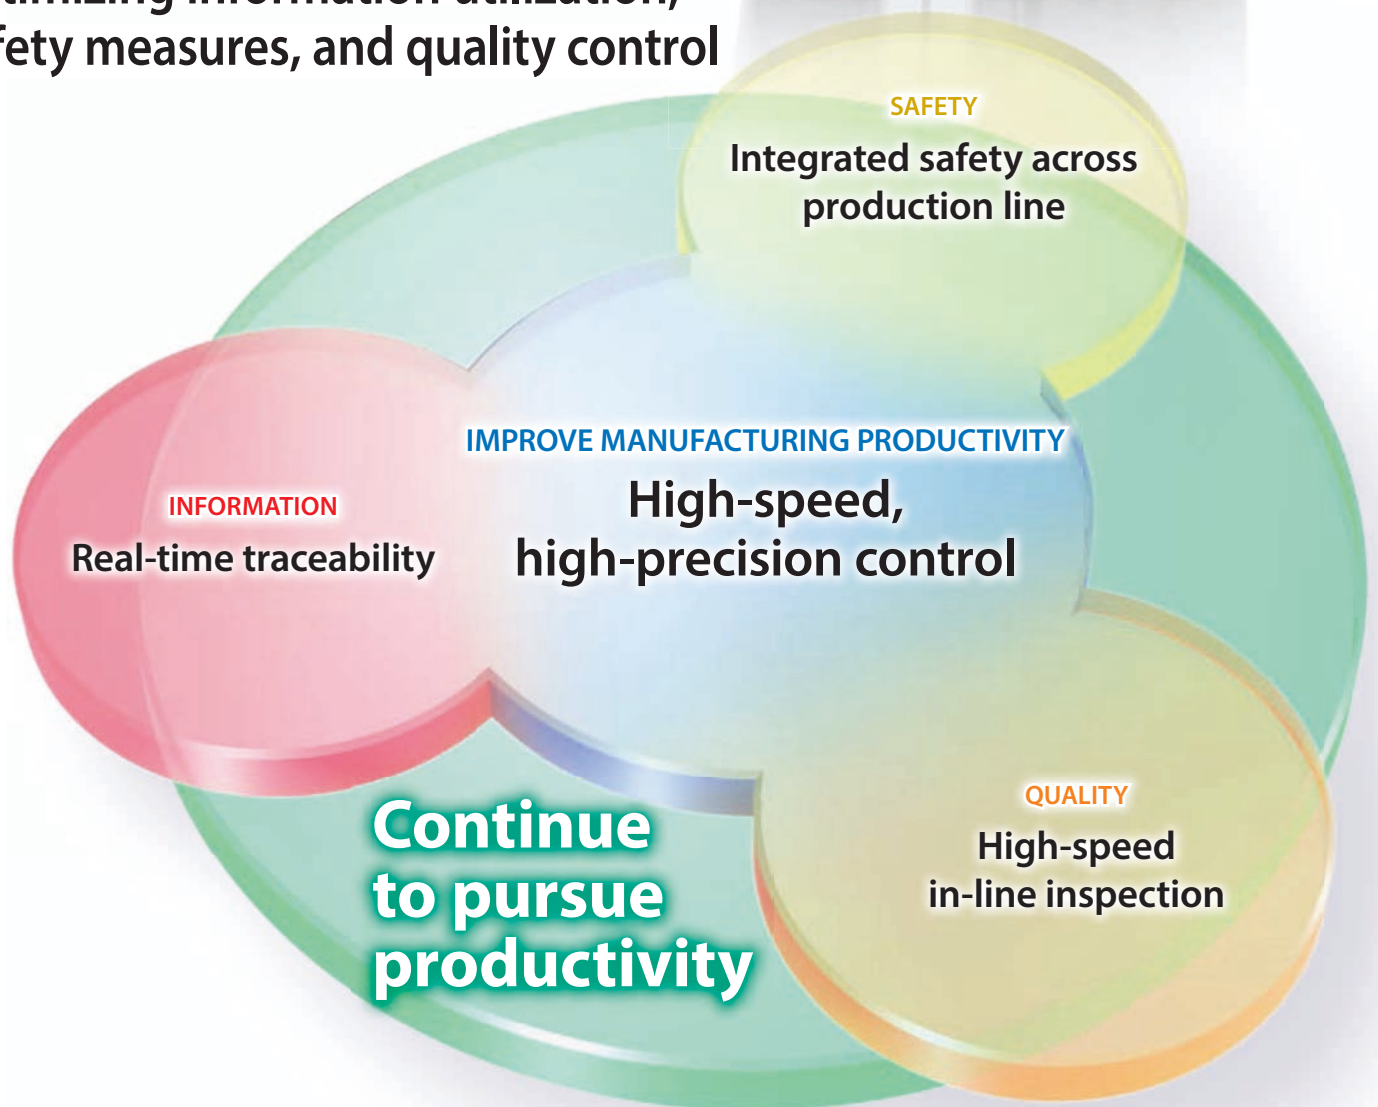


Produce faster without compromising on quality

The NX1 can utilize information, take safety measures, and control quality while at the same time improving production efficiency through high-speed, high-precision control. This contributes to continuous improvement in productivity.



Real-time traceability

The NX1 provides high-speed control while utilizing information. For example, the NX1 used for a packaging machine with the capability of handling 1,000 products per minute can collect all traceability data in synchronization with the production cycle while performing motion control.

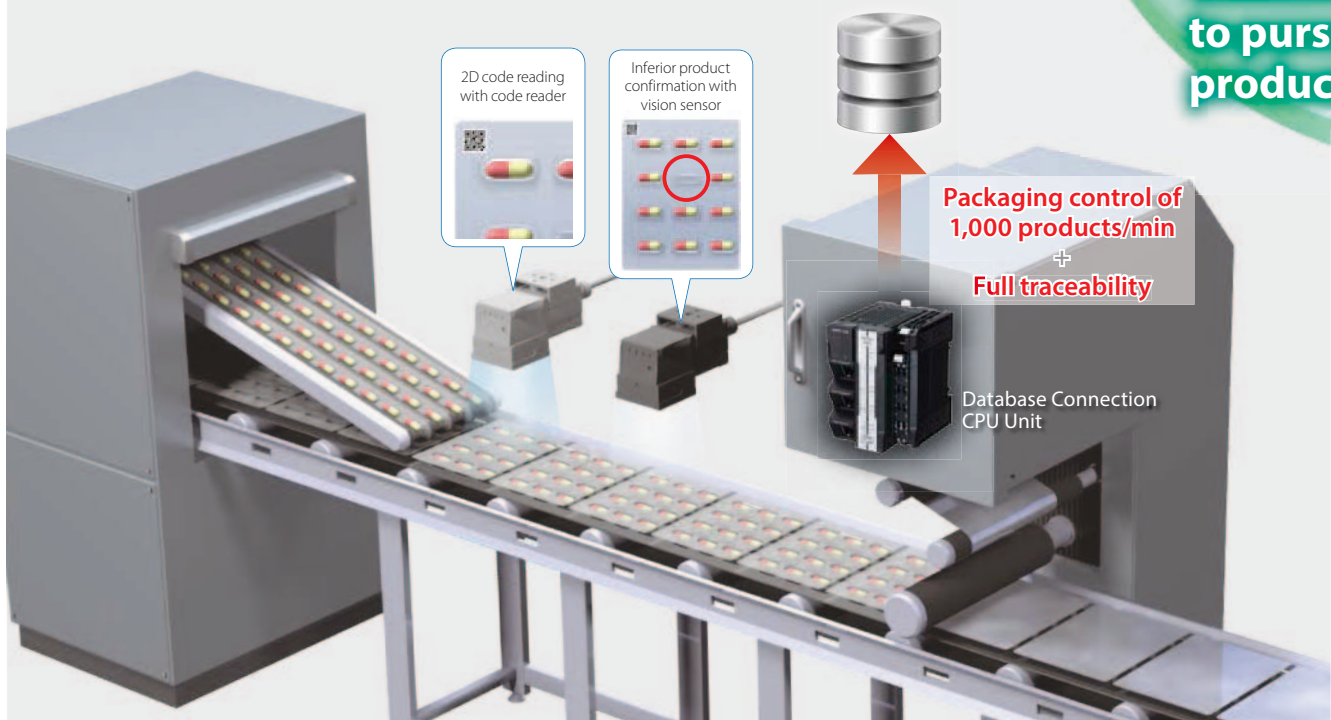

Integrated safety across production line



The NX1 is the first in the world* to integrate two different open networks: EtherNet/IP™ for scalable safety control in production lines and EtherCAT® for fast safety control in machines. Furthermore, it integrates safety control into machine control in lines that require fast cycle times.

This integration allows you to standardize machines and build flexible lines.

* Based on Omron investigation in March 2018.

SAFETY

**IMPROVE
MANUFACTURING
PRODUCTIVITY**

QUALITY

High-speed in-line inspection


Although special inspection machines with built-in PC are widely used for high-speed inspections, they require special maintenance skills.

Therefore, acceptance sampling is often carried out offline to prevent line stoppages. The NX1 can be used in conjunction with the High-speed Analog Input Unit to collect measurement data within a fixed cycle time of 5 μ s. This standard controller eliminates the need for special machines with PC and can be maintained by on-site engineers. In-line inspections of all products can also be conducted easily.

High-speed in-line inspection of all products with standard inspection machine



NX-HAD000
High-speed Analog Input Unit

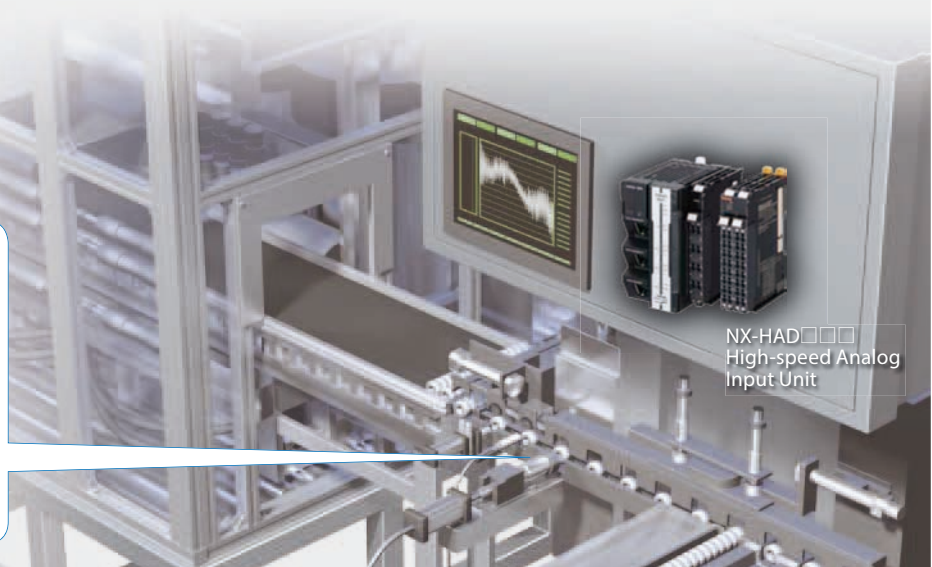

Seamless Integration: Production Line & IT sys

The NX1 Controller integrates inputs, logic, outputs, safety, and robotics, offering a wide variety of applications that leverage information to boost productivity and measures for quality and safety.

Information

Secure direct connection to database



Networks

OPC UA
EtherNet/IP™
EtherCAT®
IO-Link

Production Line

High-speed, high-precision control:
Synchronized within same cycle

The NX1 provides synchronized control of the NX bus connected I/O and motion control network within same system cycle time and jitter below 1 μ s. This enables real-time data collection and analysis as well as high-speed, high-precision control.



Safety


Vision

Motion






tems


Information
Utilization
Application

Application	NX1 functionality + product
All traceability data storage 	NX1 Database Connection CPU Unit Code reader RFID
Direct connection of machine to MES/SCADA Data utilization to prevent manipulation	NX1 OPC UA server (standard functionality)
Linkage between image and data	FH Vision System

Production
Efficiency
Improvement
Application

Application	NX1 + product
Predictive maintenance	NX-ILM400 IO-Link Master Unit IO-Link sensor
Automatically optimized temperature control 	NX-TC Temperature Control Unit E5 Digital Temperature Controller
Position and load control for servo press 	1S Servo System
Weighing control	NX-RS Load Cell Input Unit
Tracer control 	ZW-7000/5000 Confocal Fiber Displacement Sensor

Quality Control
Application

Rotator inspection	NX-HAD High-speed Analog Input Unit
Welding quality inspection	
Appearance inspection 	FH Vision System

Safety Measures
Application

High-speed safety control in machine	NX-SLS Safety CPU Unit
Safety control in line	
Intrusion detection 	F3SG-R Safety Light Curtain



Sensing

NX1 brings advanced control in miniaturized

Three industrial Ethernet ports and a power supply are housed in a compact design with a width of 66 mm. The NX1 provides key functionality to integrate control and information for advanced manufacturing applications. The new controller contributes to the pursuit of productivity improvements.

Information

Two built-in ports
 OPC UA functionality
 Modbus/TCP, FINS
 Enhanced security




Production Line

Motion control of 4/6/8/12 axes*
 Up to 64 slaves



Actual size

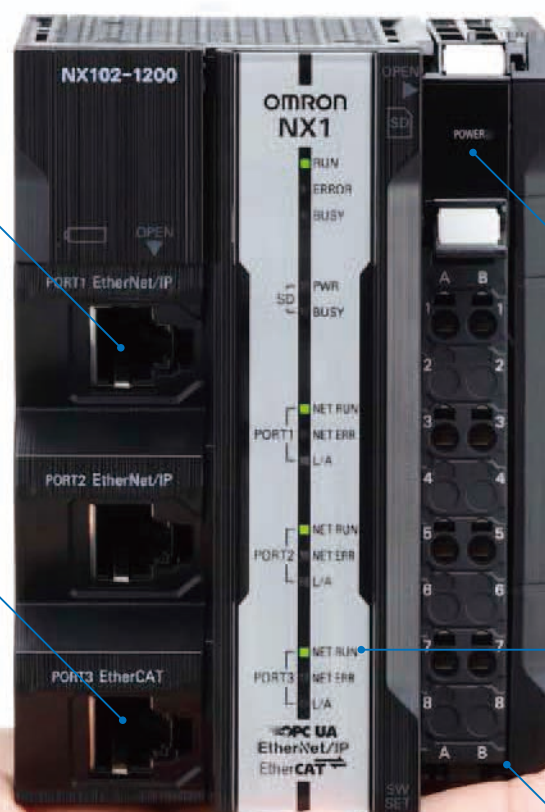

Embedded Power Supply

DC power supply without battery backup

NX bus

Up to 32 local NX I/O units



* Including single axis position control axes

High-speed, high-precision control

Synchronized control of I/O and motion within 1 ms cycle time

Jitter : 1 μ s

Memory capacity for variables : 33.5 MB*¹

Secure host connection

OPC UA is an IEC communication protocol which is listed as a recommendation for Industrie 4.0 and PackML. The NX1 comes equipped with an OPC UA server interface and provides a secure connection to IT systems such as MES and ERP.



Enhanced Ethernet functionality

Connectivity to existing devices (e.g., Modbus/TCP*², FINS communications, and connection to other vendor PLC*³) and EtherNet/IP™ performance (increased to 12,000 pps*⁴) are improved. Packet Filter enhances security, and visualization of EtherCAT® slave errors makes troubleshooting easier.

Multicore microprocessor for control and data handling

The multicore microprocessor enables information utilization including communications and traceability without compromising control performance.

*1. The total number of bytes of retained and non-retained variables.

*2. Clients instructions are supported.

*3. SLMP commands are included in the Sysmac Library.

*4. The total pps of two ports.

One software to get things done...

Sysmac Studio – Integrated Development Environment integrates programming, configuration, information, and safety.

The project version control system in the Sysmac Studio Team Development Option ensures smooth development across the team.

The Sysmac Studio includes Function Blocks for motion control and database connection, and collections of software functional components Sysmac Libraries can be downloaded from our website.

These allow you to minimize time to build systems that boost productivity.

Sysmac Studio




- Fully conforms with IEC 61131-3 standards
- PLCopen Function Blocks for Motion Control



Step	Author	Date
Step 0	Step 0	2017/01/19 0:00:00
Step 1	Step 1	2017/01/19 0:00:00
Step 2	Step 2	2017/01/19 0:00:00
Step 3	Step 3	2017/01/19 0:00:00
Step 4	Step 4	2017/01/19 0:00:00
Step 5	Step 5	2017/01/19 0:00:00
Step 6	Step 6	2017/01/19 0:00:00
Step 7	Step 7	2017/01/19 0:00:00
Step 8	Step 8	2017/01/19 0:00:00
Step 9	Step 9	2017/01/19 0:00:00
Step 10	Step 10	2017/01/19 0:00:00
Step 11	Step 11	2017/01/19 0:00:00
Step 12	Step 12	2017/01/19 0:00:00
Step 13	Step 13	2017/01/19 0:00:00
Step 14	Step 14	2017/01/19 0:00:00
Step 15	Step 15	2017/01/19 0:00:00
Step 16	Step 16	2017/01/19 0:00:00
Step 17	Step 17	2017/01/19 0:00:00
Step 18	Step 18	2017/01/19 0:00:00
Step 19	Step 19	2017/01/19 0:00:00
Step 20	Step 20	2017/01/19 0:00:00
Step 21	Step 21	2017/01/19 0:00:00
Step 22	Step 22	2017/01/19 0:00:00
Step 23	Step 23	2017/01/19 0:00:00
Step 24	Step 24	2017/01/19 0:00:00
Step 25	Step 25	2017/01/19 0:00:00
Step 26	Step 26	2017/01/19 0:00:00
Step 27	Step 27	2017/01/19 0:00:00
Step 28	Step 28	2017/01/19 0:00:00
Step 29	Step 29	2017/01/19 0:00:00
Step 30	Step 30	2017/01/19 0:00:00
Step 31	Step 31	2017/01/19 0:00:00
Step 32	Step 32	2017/01/19 0:00:00
Step 33	Step 33	2017/01/19 0:00:00
Step 34	Step 34	2017/01/19 0:00:00
Step 35	Step 35	2017/01/19 0:00:00
Step 36	Step 36	2017/01/19 0:00:00
Step 37	Step 37	2017/01/19 0:00:00
Step 38	Step 38	2017/01/19 0:00:00
Step 39	Step 39	2017/01/19 0:00:00
Step 40	Step 40	2017/01/19 0:00:00
Step 41	Step 41	2017/01/19 0:00:00
Step 42	Step 42	2017/01/19 0:00:00
Step 43	Step 43	2017/01/19 0:00:00
Step 44	Step 44	2017/01/19 0:00:00
Step 45	Step 45	2017/01/19 0:00:00
Step 46	Step 46	2017/01/19 0:00:00
Step 47	Step 47	2017/01/19 0:00:00
Step 48	Step 48	2017/01/19 0:00:00
Step 49	Step 49	2017/01/19 0:00:00
Step 50	Step 50	2017/01/19 0:00:00
Step 51	Step 51	2017/01/19 0:00:00
Step 52	Step 52	2017/01/19 0:00:00
Step 53	Step 53	2017/01/19 0:00:00
Step 54	Step 54	2017/01/19 0:00:00
Step 55	Step 55	2017/01/19 0:00:00
Step 56	Step 56	2017/01/19 0:00:00
Step 57	Step 57	2017/01/19 0:00:00
Step 58	Step 58	2017/01/19 0:00:00
Step 59	Step 59	2017/01/19 0:00:00
Step 60	Step 60	2017/01/19 0:00:00
Step 61	Step 61	2017/01/19 0:00:00
Step 62	Step 62	2017/01/19 0:00:00
Step 63	Step 63	2017/01/19 0:00:00
Step 64	Step 64	2017/01/19 0:00:00
Step 65	Step 65	2017/01/19 0:00:00
Step 66	Step 66	2017/01/19 0:00:00
Step 67	Step 67	2017/01/19 0:00:00
Step 68	Step 68	2017/01/19 0:00:00
Step 69	Step 69	2017/01/19 0:00:00
Step 70	Step 70	2017/01/19 0:00:00
Step 71	Step 71	2017/01/19 0:00:00
Step 72	Step 72	2017/01/19 0:00:00
Step 73	Step 73	2017/01/19 0:00:00
Step 74	Step 74	2017/01/19 0:00:00
Step 75	Step 75	2017/01/19 0:00:00
Step 76	Step 76	2017/01/19 0:00:00
Step 77	Step 77	2017/01/19 0:00:00
Step 78	Step 78	2017/01/19 0:00:00
Step 79	Step 79	2017/01/19 0:00:00
Step 80	Step 80	2017/01/19 0:00:00
Step 81	Step 81	2017/01/19 0:00:00
Step 82	Step 82	2017/01/19 0:00:00
Step 83	Step 83	2017/01/19 0:00:00
Step 84	Step 84	2017/01/19 0:00:00
Step 85	Step 85	2017/01/19 0:00:00
Step 86	Step 86	2017/01/19 0:00:00
Step 87	Step 87	2017/01/19 0:00:00
Step 88	Step 88	2017/01/19 0:00:00
Step 89	Step 89	2017/01/19 0:00:00
Step 90	Step 90	2017/01/19 0:00:00
Step 91	Step 91	2017/01/19 0:00:00
Step 92	Step 92	2017/01/19 0:00:00
Step 93	Step 93	2017/01/19 0:00:00
Step 94	Step 94	2017/01/19 0:00:00
Step 95	Step 95	2017/01/19 0:00:00
Step 96	Step 96	2017/01/19 0:00:00
Step 97	Step 97	2017/01/19 0:00:00
Step 98	Step 98	2017/01/19 0:00:00
Step 99	Step 99	2017/01/19 0:00:00
Step 100	Step 100	2017/01/19 0:00:00

Project version control function




Safety



Safety Function Blocks




Motion control




Information utilization



DB connection Function Blocks




Programming




HMI



Motion Function Blocks



Vision





High-speed Analog Inspection Library

Ordering Information

International Standards

The standards are abbreviated as follows: U: UL, U1: UL(Class I Division 2 Products for Hazardous Locations), C: CSA, UC: cULus, UC1: cULus(Class I Division 2 Products for Hazardous Locations), CU: cUL, N: NK, L: Lloyd, CE: EU Directives, RCM: Regulatory Compliance Mark and KC: KC Registration. Contact your OMRON representative for further details and applicable conditions for these standards.

NX-Series NX102 CPU Units

Product Name	Specifications					Model	Standards
	Program capacity	Memory capacity for variables	Maximum number of used real axes				
				Motion control axes	Single-axis position control axes		
NX102 CPU Unit 	5 MB	1.5 MB (Retained during power interruption)/	12	8	4	NX102-1200	UC, CE, RCM, KC
			8	4	4	NX102-1100	
			6	2	4	NX102-1000	
NX102 Database Connection CPU Unit  <div>Available soon</div>		32 MB (Not retained during power interruption)	4	0	4	NX102-9000	
			12	8	4	NX102-1220	
			8	4	4	NX102-1120	
			6	2	4	NX102-1020	
			4	0	4	NX102-9020	

Automation Software Sysmac Studio

Please purchase a DVD and required number of licenses the first time you purchase the Sysmac Studio. DVDs and licenses are available individually. Each model of licenses does not include any DVD.

Product Name	Specifications	Number of licenses	Media	Model
Sysmac Studio Standard Edition Ver.1.□□	The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT Slave, and the HMI. Sysmac Studio runs on the following OS. Windows 7 (32-bit/64-bit version)/ Windows 8 (32-bit/64-bit version)/ Windows 8.1 (32-bit/64-bit version)/ Windows 10 (32-bit/64-bit version) The Sysmac Studio Standard Edition DVD includes Support Software to set up EtherNet/IP Units, DeviceNet slaves, Serial Communications Units, and Support Software for creating screens on HMIs (CXDesigner). For details, refer to your local OMRON website.	--- (Media only)	DVD	SYSMAC-SE200D
		1 license ^{*1}	---	SYSMAC-SE201L

*1. Multi licenses are available for the Sysmac Studio (3, 10, 30, or 50 licenses).

Note. For Sysmac Studio Team Development Option, refer to your local OMRON website.


Collection of software functional components Sysmac Library

Please download the Sysmac Library from the following URL and add it to the Sysmac Studio.


http://www.ia.omron.com/sysmac_library/

Product name	Specifications	Model
SLMP Communications Library	The SLMP Communications Library is used to control communications with Mitsubishi sequencers using the SLMP communications protocol.	SYSMAC-XR017
High-Speed Analog Inspection Library	The High-speed Analog Inspection Library records analog input values acquired by the High-speed Analog Input Units in time.	SYSMAC-XR016

High-speed Analog Input Unit

Product name	Specifications					Model	
	Number of points	Input range	Conversion time	Trigger input section			
				Number of points	Internal I/O common		
High-speed Analog Input Unit 	4 points	-10 to +10 V	1 to 5 V	5 μs/4 Ch	4 points	NPN	NX-HAD401
		-5 to +5 V	0 to 20 mA			PNP	NX-HAD402
		0 to 10 V	4 to 20 mA				
		0 to 5 V					

Safety CPU Unit

Product name	Specifications				Model
	Maximum number of safety I/O points	Program capacity	Number of safety master connections	I/O refreshing method	
Safety CPU Unit  Available soon	1024 points	2048 kB	128	Free-Run refreshing	NX-SL5500
	2032 points	4096 kB	254		NX-SL5700

Related catalogs



Machine Automation Controller NX1 Datasheet

Cat. No. P130



High-speed Analog Input Unit NX-HAD401/402 Catalog

Cat. No. P128

- Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.
- Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
- EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
- EtherNet/IP™ and DeviceNet™ are trademarks of ODVA.
- OPC UA is a trademark of OPC Foundation.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.
- Some images are used under license from Shutterstock.com.

OMRON Corporation Industrial Automation Company Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2018 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_1_0418

Cat. No. P129-E1-01

Printed in Japan

0418(0418)